

Your partner for more
than 100 years.
product portfolio



UV-OUTPUT GUARANTEED




Top in every relation.

Tanning lamps

Type	Part number	Nominal wattage (W)	Socket	Length (mm)
OH M BLUE:Q 400 E	80037206	400	GY 9,5	108,50
OH M BLUE:Q 400 S	80037197	400	R7s	106,00
OH M BLUE:Q 500 EC	80037208	500	GY 9,5 Coded	108,50
OH M BLUE:Q 500 EC LTD.	80040693	500	GY 9,5	108,50
OH M BLUE:Q 500 S	80037198	500	R7s	106,00
OH M BLUE:Q 800 EC	80040903	800	GY 9,5 Coded	119,00
OH M BLUE:Q 800 L	80040992	800	Lead	115,00
OH M BLUE:Q 800 S	80040991	800	R7s	115,00
OH M 400 S	45006328	400	R7s	106,00
OH M 400 L	45006329	400	Lead	110,60
OH M 30/50 E G (gold coating)	80041256	300 - 500	GY9,5	108,50
OH M 500 S	45006330	500	R7s	106,00
OH M 500 L	45006331	500	Lead	110,00
OH M 500 EC	80033748	500	GY 9,5 Coded	108,50
OH M 800 S	45006420	800	R7s	115,00
OH M 800 L	45006421	800	Lead	115,00
OH M 800 E	45006422	800	GY 9,5	108,50
OH M 30/50 E*	45006357	300 - 500	GY 9,5	108,50
OH M 50/100 E LTD*	80024860	500 - 1000	GY 9,5 coded	108,50

MagicSun® Lamps and Tubes

- Guaranteed up to 700 hours high tanning
- Output with no more than 20 % reduction in UVA output
- The useful lifetime for MagicSun lamps is 1 000 hours

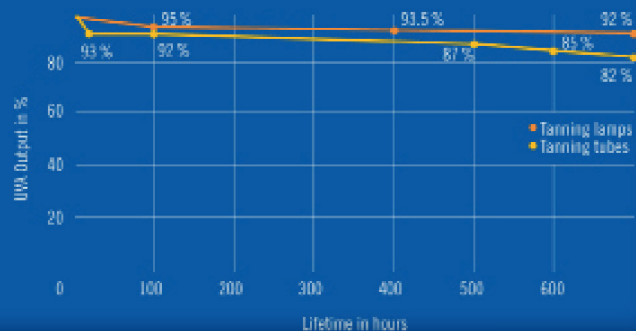

* High-pressure tanning lamps can be operated in the power range stated. However, they are optimized for operation with a derminal nominal wattage. The performance of a high-pressure lamp depends on its operating mode and general conditions, such as cooling, and has to be checked individually.

** typical values

*** for electronic ballast

Tanning tubes MagicPremium

Type	Part number	Nominal wattage (W)	Length (mm)	Electrode	UVA-flux**	UV-Code
OH MP A-TAN 3URO 100 R	80041231	100	1760	sm	31	100-R-24/1,8
OH MP B-TAN 3URO 160 W	80041201	160	1760	sm	30	160-O-34/4,2
OH MP A-TAN 3URO 160 R	80040953	160	1760	sm	39	160-R-31/1,6
OH MP A-TAN 3URO 160 R EL***	80041230	80-200	1760	sm	38	160-R-28/1,6
OH MP B-TAN 3URO 180 19 EL***	80041241	80-200	1900	sm	39	180-R-33/1,7
OH MP A-TAN 3URO 160 EL***	80041240	80-200	1760	sm	30	160-O-34/4,2
OH MP A-TAN 3URO 160 R LO	80040951	160	1760	lm	50	160-R-124/6,1

Tanning tubes 3uro



Type	Part number	Nominal wattage (W)	Length (mm)	Electrode	UVA-flux**	UV-Code
OH M 3URO SLIM 25 S	80040959	25	520	sm	6	25-O-14/3,5
OH M 3URO 80 XS + R	80040504	80	1500	sm	23	80-R-29/2,9
OH M 3URO 100 XS R	80040997	100	1760	sm	28	100-R-19/1,5
OH M 3URO 100 XS + R	80040462	100	1760	sm	30	100-R-31/3,0
OH M 3URO 120 XSR	80041034	120	2001	sm	35	120-R-37/3,4
OH M 3URO 160 R 04	80041100	160	1760	sm	32	160-R-24/2,0
OH M 3URO 160 XS + R	80040453	160	1760	sm	35	160-R-33/2,2
OH M 3URO 160 XS + R03+	80041184	160	1760	sm	35	160-R-44/3,4
OH M 3URO 160 R 06	80041106	160	1760	sm	36	160-R-36/2,4
OH M 3URO 180 XSS R	80041026	180	2001	sm	42	180-R-24/1,4
OH M 3URO 180 R 03	80041112	180	2001	sm	38	180-R-37/2,4
OH M 3URO 160 W LM	80041206	160	1760	lm	47	160-R-27/1,6
OH M 3URO 225 XS + R	80041176	225	2001	lm	58	225-R-24/1,0
OH M Redlight 3URO 100	80041335	100	1760	sm	18	100-R-26/4,7
OH M Redlight 3URO 160	80041336	160	1760	sm	31	160-R-34/2,3
OH M Redlight 3URO 180	80041337	180	2000	sm	35	180-R-35/2,5

Tanning tubes

Type	Part number	Nominal wattage (W)	Length (mm)	Electrode	UVA-flux**	UV-Code
OH M 16/100 R	80040350	100	1760	sm	30	100-R-61/5,5
OH M 23/100 R	45006432	100	1760	sm	30	100-R-75/7,5
OH M 160 S R	80040413	160	1760	sm	38	160-R-62/4,4
I-TAN 20/160 R	80040589	160	1760	sm	36	160-R-108/6,8
I-TAN 26/160 R	80040587	160	1760	sm	35	160-R-123/8,5
I-TAN 33/160 R	80040586	160	1760	sm	35	160-R-138/10,3
OH M 20/160 R	45007053	160	1760	lm	46	160-R-112/6,4
OH M 23/160 R	45007054	160	1760	lm	46	160-R-123/7,5
OH M 26/160 R	80006133	160	1760	lm	48	160-R-134/8,3
OH M 16/160 R	45006505	160	1760	lm	46	160-R-90/5,2
OH M 20/180 R	45006685	180	2001	lm	55	180-R-108/6,5
OH M 20/200 R	80021273	180	2001	lm	50	180-R-108/6,5
OH M VERTIKAL 200 R	80034834	180	2001	lm	50	180-R-151/10,3



Use of Original Hanau Tanning lamps and tubes only under consideration of equipment type as well as indivudal skin type!


The golden mean

Tanning lamps

Type	Part number	Nominal wattage (W)	Socket	Length (mm)
OH N 400 L	45002246	400	Lead	110,60
OH N 400 SL	45002251	400	R7s	117,90
OH N 500 S	45002247	500	R7s	106,00
OH N 24/50 EF (gold coded)	45006544	400	GY 9,5	108,50
OH N 30/50 E	45002259	300 - 500	GY 9,5	108,50
OH N 30/50 EC	80001936	300 - 500	GY 9,5 Coded	108,50
OH N 50/100 E	45006359	700	GY 9,5	108,50
OH N 70/100 E	45004995	1.000	GY 9,5	129,00
OH N 70/120 E	80008600	1.000	GY 9,5	118,00
OH N 2000 PLUS	45002257	2000W/400V	Lead	171,00

NewColors® Lamps and Tubes

- Guaranteed up to 600 hours high tanning
- Output with no more than 30 % reduction in UVA Output
- The useful lifetime for NewColors lamps is 800 hours

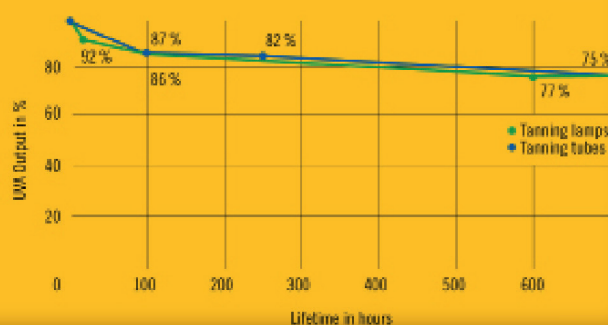

* High-pressure tanning lamps can be operated in the power range stated. However, they are optimized for operation with a dermimed nominal wattage. The performance of a high-pressure lamp depends on its operating mode and general conditions, such as cooling, and has to be checked individually.

** typical values

Tanning tubes 3uro



Type	Part number	Nominal wattage (W)	Length (mm)	Electrode	UVA-flux**	UV-Code
OH N 3URO SLIM 25 S	80040960	25	520	sm	6	25-O-14/3,5
OH N 3URO SLIM 25 L	80041014	25	520	sm	6	25-O-27/6,3
OH N 3URO 80 XS R	80040994	80	1500	sm	20	80-R-24/2,0
OH N 3URO 100 XS R	80040996	100	1760	sm	28	100-R-19/1,5
OH N 3URO 100 S R	80041021	100	1760	sm	27	100-R-29/2,4
OH N 3URO 100 XS + R	80040461	100	1760	sm	30	100-R-31/3,0
OH N 3URO 120 R 02	80041098	120	2001	sm	35	120-R-19/2,0
OH N 3URO 140 XSS R	80041010	140	1500	sm	30	140-R-25/1,4
OH N 3URO 160 XS + R	80040450	160	1760	sm	35	160-R-33/2,2
OH N 3URO 160 XS R	80041017	160	1760	sm	35	160-R-33/2,2
OH N 3URO 160 XS + R R03+	80041173	160	1760	sm	35	160-R-44/3,4
OH N 3URO 180 XSS R	80041025	180	2001	sm	42	180-R-24/1,4
OH N 3URO 180 XS R	80040452	180	2001	sm	45	180-R-44/3,4

Tanning tubes with/without reflector

Type	Part number	Nominal wattage (W)	Length (mm)	Electrode	UVA-flux**	UV-Code
OH N SLIM 21/25	45006361	25	520	sm	6	25-O-39/9,2
OH N SLIM 21/25 R	45006362	25	520	sm	6	25-R-52/8,4
OH N 13/80 R	45007017	80	1500	sm	22	80-R-48/4,6
OH N 13/100 R	45007021	100	1760	sm	30	100-R-50/4,5
OH N 16/100 R	45007024	100	1760	sm	30	100-R-61/5,5
OH N 8/160 R	80040422	160	1760	sm	35	160-R-49/3,0
OH N 16/160 R	45007031	160	1760	sm	36	160-R-86/5,9
OH N 20/160 R	45007043	160	1760	sm	35	160-R-108/6,8
OH N 23/160 R	80020658	160	1760	sm	34	160-R-115/7,6
OH N 20/180 R	80005942	180	2001	sm	45	180-R-111/7,4



Use of Original Hanau Tanning lamps and tubes only under consideration of equipment type as well as indivudal skin type!


Great price / performance ratio

Tanning lamps

Type	Part number	Nominal wattage (W)	Socket	Length (mm)
OH C SOLUTION 400 E	80040435	400	GY 9,5	108,50
OH C 402 S	56001346	400	R7s	106,00
OH C 535 L	45002221	500	Lead	110,00
OH C 1000 L	80006331	1.000	Lead	170,00
OH C 1144 L	56066974	1.000	Lead	137,00
OH C 1144 Z4	56001207	1.000	Lead	137,00
OH C 1169 R E	45006186	700	GY 9,5	107,00
OH C 2400 L	45006414	2.400	Lead	220,00
OH C 2829 L	56069025	2.000	Lead	171,00
OH COLLAGEN 30/50 E*	80040791	300 - 500	GY 9,5	108,50
OH COLLAGEN 30/50 S*	80040800	300 - 500	R7s	106,00
System Varius EF LVD	80041067	250	Varius	
Varius EF	80026500	250	Varius	80,00
Socket Varius VST. (UL) 150 MM	80030656		Varius	
Socket Varius (VDE) VST.	80023105		Varius	
Reflector + filter for Varius on request				

CLASSICS® Lamps and Tubes

- Classics lamps and tubes have a standard lifetime of 500 hours
- No more than 30 % reduction in UVA output
- The useful lifetime for Classics lamps is 700 hours

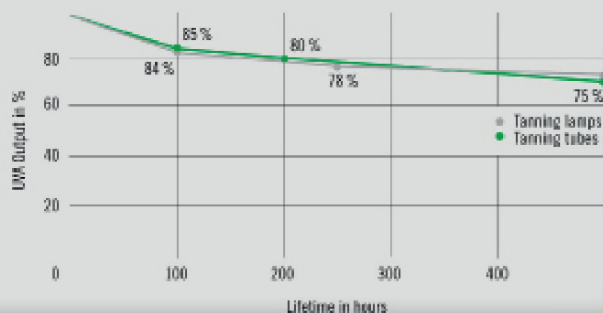

Tanning tubes 3uro



Type	Part number	Nominal wattage (W)	Length (mm)	Electrode	UVA-flux**	UV-Code
OH C 3URO SLIM 25 S	80015685	25	520	sm	5,5	25-O-14/3,5
OH C 3URO SLIM 25 L	80006134	25	520	sm	6	25-O-27/6,3
OH C 3URO 80 XS R	45006668	80	1500	sm	20	80-R-24/2,0
OH C 3URO 100 M	45006670	100	1760	sm	27	100-O-21/4,0
OH C 3URO 100 XL	45006677	100	1760	sm	25	100-O-31/6,8
OH C 3URO 100 XS R	45006669	100	1760	sm	28	100-R-19/1,5
OH C 3URO 100 S R	80040460	100	1760	sm	27	100-R-29/2,4
OH C 3URO 140 XSS R	80041009	140	1500	sm	30	140-R-25/1,4
OH C 3URO 160 XSS R	80040447	160	1760	sm	35	160-R-29/1,6
OH C 3URO 160 XS + R	80041023	160	1760	sm	35	160-R-33/2,2
OH C 3URO 180 XSS R	80041024	180	2001	sm	42	180-R-24/1,4

Tanning tubes

Type	Part number	Nominal wattage (W)	Length (mm)	Electrode	UVA-flux**	UV-Code
OH C 160 M R	45006675	160	1760	sm	30	160-R-52/3,7
OH C 10/180 R	80025165	180	2001	sm	42	180-R-49/3,0

Collagen tubes

Type	Part number	Nominal wattage (W)	Length (mm)	Electrode	UVA-flux**	UV-Code
OH C COLLAGEN SLIM 25	80040778	25	520	sm	0	-
OH C COLLAGEN 100 R	80040777	100	1760	sm	0	-
OH C COLLAGEN 160 R	80040775	160	1760	sm	0	-
OH C COLLAGEN 180 R	80040774	180	2000	sm	0	-



Use of Original Hanau Tanning lamps and tubes only under consideration of equipment type as well as individual skin type!



HN Sunlight GmbH
Original Hanau
Kurt-Blaum-Platz 2
63450 Hanau
Germany

Tel.: +49 (0) 6181 490 23 16
Fax: +49 (0) 6181 490 23 80
info@original-hanau.com
www.original-hanau.com



Use of Original Hanau tanning lamps and tubes only under consideration of equipment type as well as individual skin type. All data published has been determined by measurements made in the laboratory under standard conditions. Values given for the drop in UVA output and the guaranteed operating life for tubes are based on the 20 hour value and relate to operation under conditions determined by HN Sunlight GmbH for a switching cycle of 25 minutes on/5 minutes off. The sun erythema factor has been calculated for a single tube at a distance of 25 cm. Operation in accordance with technical data sheet. The UV Guarantee relates to an operating life of 700 hours with a maximum fall-off of UVA output of 20% for MagicSun lamps, 600 hours with a maximum fall-off of UVA output of 30% for NewColors products and 500 hours with a maximum fall-off of UVA output of 30% for Classic tanning lamps. Not covered by the guarantee are products damaged by misuse or external actions. The guarantee applies only provided that the lamp was operated in the equipment for which it has been designed. HN Sunlight reserves the right to take back and check damaged goods. A replacement

product will be supplied in the event of a successful claim. There are certain risks associated with sun bathing, both in natural sun and in solarium. UV radiation, especially excessive or improper use of UV radiation, may lead to sunburn (UV erythema), damage to eyes (conjunctivitis, inflammation of the cornea or cataracts) and premature aging of the skin. Repeated extreme exposure may cause skin cancers. The use of certain medications or cosmetic products can increase the skin's sensitivity to UV radiation. Tanning lamps emit infrared radiation as well as UV. Infrared radiation, with improper use, can damage eyes (thermal retinal damage, damage to cornea and lenses, cataracts) and skin (IR erythema and burning). Always follow our operating instructions.

Contraindications: (A) These products are contraindicated for use on persons under the age of 18 years. (B): These products must not be used if skin lesions or open wounds are present. (C) These products should not be used on individuals who have had skin cancer or have a family history of skin cancer. (D) Persons repeatedly exposed to UV radiation should be regularly evaluated for skin cancer.